



ACE PNEUMATICS PVT. LTD.

CHIPPING HAMMER


Construction Tools / Air Tools

ACE CH4130 Chipping Hammer / Four Bolt Chipping Hammer
Equipped with a 'D' handle and an external trigger, these chippers are available in 2", 3", and 4" cylinder options, with a choice between "Round" and "Hex" shanks to prevent chisel rotation. They come with a muffler assembly and a unique ring valve design for more powerful blows in challenging conditions. Plus, the spline locking system adds an extra layer of safety by preventing handle or cylinder loosening.



TECHNICAL SPECIFICATION:-

Model	ACE CH4130 2H /2R	ACE CH4130 3H /3R	ACE CH4130 4H /4R
Weight	8.4 kg (18.5 lb)	9 kg (20 lb)	9.4 kg (21 lb)
Length	356 mm (14")	387 mm (15.25")	419 mm (16.50")
Blow per Minute	3600	2280	1800
Piston Stroke	50.8 (2")	76.2 mm (3")	101.6 mm (4")
Air Pressure	6.2 bar (90 PSI)	6.2 bar (90 PSI)	6.2 bar (90 PSI)
Air Consumption	14 l/s (30 cfm)	15.5 l/s (33 cfm)	16 l/s (34 cfm)
Piston Dia	28.6 mm (1.13")	28.6 mm (1.13")	28.6 mm (1.13")
Air inlet (UNS thread)	22.2 mm (7/8")	22.2 mm (7/8")	22.2 mm (7/8")
Retainer type	Spring	Spring	Spring
Shank	Hex 14.7 mm (0.580") Round 17.3 mm (0.680")	Hex 14.7 mm (0.580") Round 17.3 mm (0.680")	Hex 14.7 mm (0.580") Round 17.3 mm (0.680")

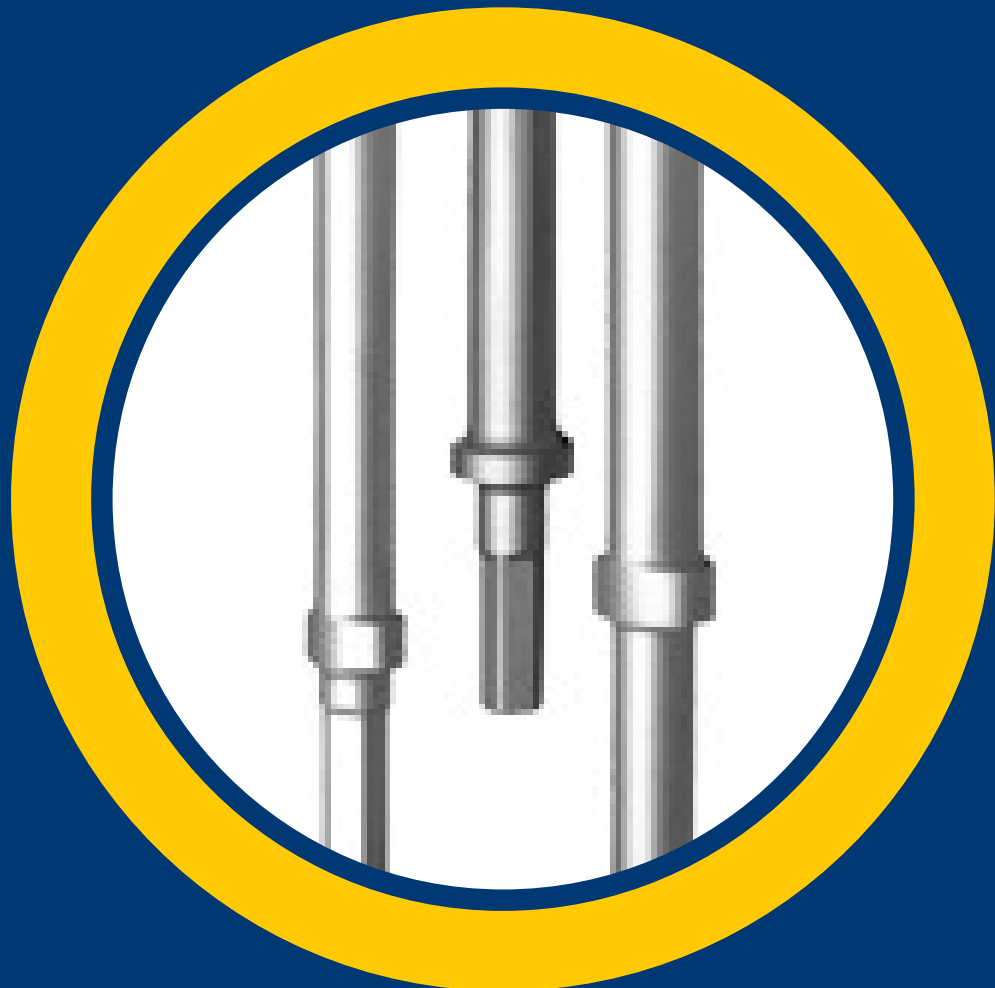

APPLICATION:-

- Ideal for light to medium demolition tasks.
 - Trusted in foundries, shipyards, refineries.
 - Essential for fabrication shops and construction projects.
 - Versatile in scaling and scraping concrete and metal surfaces.
 - A valuable tool for various industrial applications, including chipping and scaling.
- Note:** - All Manufacturer names, part numbers, and descriptions are for reference only; listing does not imply their products. (REV.05 JAN 2025)