



Ace Pneumatics Pvt. Ltd.



MINING,
CONSTRUCTION,
DEMOLITION
TOOLS

LONG LASTING, ROBUST AND AFFORDABLE PRODUCTS.

**POWER
TECHNOLOGY
and TRUST**

ACE PNEUMATICS



Innovating Excellence Since 1993

ACE Pneumatics Pvt. Ltd. is a leading **manufacturer and exporter of pneumatic, mining, construction, and demolition tools**, serving customers across India and international markets for over **three decades**. With a strong focus on **quality, durability, and performance**, we have earned the trust of contractors, distributors, and OEM partners worldwide.

Our state-of-the-art manufacturing facility is spread across **11,300 sq. meters** in **Ahmednagar, Maharashtra, India**. The plant is equipped with advanced machinery such as **CNC, VMC, HMC, VORTEX machines, and precision grinding equipment**.

A dedicated team of **100+ skilled and trained professionals** ensures that every product meets strict quality and performance standards. ACE Pneumatics operates with **fully integrated in-house forging and heat-treatment facilities**. This allows us to control the entire manufacturing process—from raw material to finished product—ensuring **consistent quality, reliability, and long service life**.

Our wide product portfolio includes:

- ★ Underground Rock Drills
- ★ Paving Breakers
- ★ Rock Drills
- ★ Rock Breakers and Spare Parts
- ★ Pick Hammers and Chipping Hammers
- ★ Rivet Busters and Hammers
- ★ Specialized Chisels, Moil Points, Snaps, and Jumbo Chisels

These products are designed to meet the demanding requirements of **construction, mining, quarrying, and demolition applications**.

We offer **OEM supply and contract manufacturing solutions**, customized to customer specifications. Our strong quality assurance system monitors every stage—from material selection to assembly and final testing—ensuring dependable results.

At **ACE Pneumatics**, quality is not just a goal—it is a commitment.

Every tool is engineered to deliver **high performance, longer life, and reduced downtime**, helping our customers improve productivity and profitability.

INDEX

SR NO.	CONTENTS	PAGE NO.
1	Paving breaker	3
2	Rivet Buster	4
3	Pick Hammer	5
4	Chipping Hammer	6
5	Clay Digger	7
6	Rotary Drill	7
7	Rock Drill	8
8	Jackleg Drill	9
9	Jackleg/ pusherleg	9
10	Pneumatic Drifter	10
11	DTH hammer	10
12	Rammers	11
13	Scabblers	11
14	Die Grinder	12
15	Needle Scaler	12
16	Weld Flux Chipper	13
17	Rock drilling tools	13-17
18	Paving breaker steel / chisel	18
19	Chipping hammer steel	19
20	Pick hammer chisel	19
21	Pick hammer steel	20
22	Rivet buster tool	20
23	Rivet byoer snap/ rivet sets	21
24	Plug drill (TCT rod)	21
25	Air line Lubricator	22
26	Rock breaker (hydraulic breaker)	23
27	Hydraulic breaker spare parts	24

Paving Breakers



ACE PB 0112




ACE PB 117



ACE PB 117L



ACE PB 1210

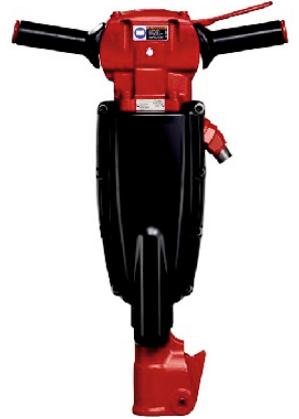

ACE PB 1210 SVR



ACE PB 1230



ACE PB 1240



ACE PB 777



ACE TPB 60



ACE TPB 90

Model	Weight		Length		BPM	Piston Stroke		Air Inlet		Air Pressure		Air Consumption		Shank Size (mm)
	(Kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(bar)	(psi)	(l/s)	(cfm)	
ACE PB 0112	13.5	30	535	21"	1620	93	3.66"	19	3/4"	6	87	23	49	25x108
ACE PB 117	36	80	740	29"	1200	165	6.50"	19	3/4"	6	87	35	74	32x160
ACE PB 117L	40	89	710	28"	1200	165	6.50"	19	3/4"	6	87	35	74	32x160
ACE PB 1210	20	44	540	21.2"	1400	108	4.25"	19	3/4"	6	87	23	48	25x108
ACE PB 1210SVR	22	49	600	24"	1400	108	4.25"	19	3/4"	6	87	23	48	25x108
ACE PB 1230	29	64	680	27"	1300	140	5.50"	19	3/4"	6	87	30	64	32x160
ACE PB 1240	39	86	735	29.4"	1150	158	6.25"	19	3/4"	6	87	38	81	32x160
ACE PB 777	35	77	715	28.2"	1300	188	7.32"	19	3/4"	6	87	33	72	32x160
ACE TPB 60	30	68	645	25.3"	1400	100	3.93"	19	3/4"	6	87	28	58	28x152
ACE TPB 90	42	93	725	28.5"	1250	152	5.98"	19	3/4"	6	87	36	78	28x152

Rivet Buster



ACE RB4611P



ACE RB4611D



ACE RB4608P



ACE RB4608D



ACE RB133D



ACE RB 1133D



Model	Weight		Length		BPM	Piston Stroke		Air Inlet		Air Consumption		Handle Type
	(Kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(l/s)	(cfm)	
ACE RB4611P	15	33	660	26"	720	279	11"	12.7	1/2"	21	45	Pistol Grip
ACE RB4611D	15.5	34	676	26.6"	720	279	11"	12.7	1/2"	21	45	D
ACE RB4608P	14	30.8	584	23"	900	203	8"	12.7	1/2"	21	45	Pistol Grip
ACE RB4608D	14.2	31	600	23.6"	900	203	8"	12.7	1/2"	21	45	D
ACE RB133D	13.6	30	571	22.5"	1140	203	8"	12.7	1/2"	21	45	D
ACE RB 1133 D	15.7	34.7	648	25.5"	850	279	11"	12.7	1/2"	21	45	D

Model	Weight		Length		BPM	Piston Stroke		Air Inlet		Air Consumption		Handle Type
	(Kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(l/s)	(cfm)	
ACE RH4689 D	9.7	21	440	17.2"	1500	-	-	12.7	1/2"	26	50	D
ACE RH4689 P	9.2	20.3	430	16.9"	1500	-	-	12.7	1/2"	21	45	Pistol Grip



ACE K13



ACE 33



ACE 37



ACE TPB 7



ACE 05 PS



ACE 09 PS



ACE 12 PS

Model	Weight		Length		BPM	Piston Stroke		Air Inlet		Air Pressure		Air Consumption		Shank Size	
	(Kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(l/s)	(cfm)	(l/s)	(cfm)	(mm)	(inch)
ACE K 13	13.3	29.3	525	20.6"	1910	125	4.92	19	3/4"	5.5	79.7	19.16	40.60	26X70	1.02"X2.7"
ACE 33	5.5	12.1	430	17"	2000	129	5.07	19	3/4"	5.5	79.7	19.16	40.60	21X12	0.826"X0.472"
ACE 37	8.5	18.73	640	25"	2650	137	5.39	19	3/4"	5.5	79.7	18.33	38	23X14	0.905"X0.551"
ACE TPB 7	7.2	16	465	18.3"	1250	120	4.7	19	3/4"	6	87	1	35.3	26 X 80	1" X 3.14"
ACE 05 PS	5.5	12	380	15"	2760	44	1.73	19	3/4"	7	102	9.5	20	19 X 50	0.75" X 1.96"
ACE 09 PS	10	22	500	19.7"	1800	60	2.36	19	3/4"	7	102	18.5	39	22 X 82.5	7/8" X 3 1/4"
ACE 12 PS	10.5	23.1	550	21.7"	1600	70	2.76	19	3/4"	7	102	21.3	45	22 X 82.5	7/8" X 3 1/4"

Chipping Hammer



ACE CH 4123 2H / 3H / 4H



ACE CH 4125 2H / 3H / 4H



ACE CH 4130 2H / 3H / 4H



ACE Ch4123 2R / 3R / 4R



ACE CH 4123 2R / 3R / 4R



ACE CH 4130 2R / 3R / 4R

Model	Weight		Length		BPM	Piston Stroke		Air Inlet		Air Consumption		Shank Size	Retainer Type
	(Kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(l/s)	(cfm)		
ACE CH4123 2H/2R	7	15	375	14.8"	2220	50.8	2"	9.5	3/8"	14	30	Hex 14.7 & Round 17.3	Spring
ACE CH4123 3H/3R	7.5	16.7	425	16.73"	2050	76.2	3"	9.5	3/8"	15	31		
ACE CH4123 4H/4R	8.6	19	460	18.1"	1600	101.6	4"	9.5	3/8"	16	32		
ACE CH4125 2H/2R	7	15.4	380	15"	2100	50.8	2"	9.5	3/8"	15.5	33	Hex 14.7 & Round 17.3	Spring
ACE CH4123 3H/3R	7.6	16.7	430	17"	1650	76.2	3"	9.5	3/8"	16	34		
ACE CH4125 2H/2R	8.4	18.5	455	19"	1440	101.6	4"	9.5	3/8"	16.5	35		
ACE CH4130 2H/2R	8.4	18.5	356	14"	3600	50.8	2"	22.2	7/8"	14	30	Hex 14.7 & Round 17.3	Spring
ACE CH4130 3H/3R	9	20	387	15.25"	2280	76.2	3"	22.2	7/8"	15.5	33		
ACE CH4130 4H/4R	9.4	21	419	16.50"	1800	101.2	4"	22.2	7/8"	16	34		

Clay Digger



ACE CD 222



ACE CD FI22

Model	Weight		Length		BPM	Piston Stroke		Air Inlet		Air Consumption		Shank Size	
	(Kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(l/s)	(cfm)	(mm)	(inch)
ACE CD222	11	24	533	21"	1500	88	3.46"	19	3/4"	19	40	22 X 82.5	7/8" X 3 1/4"
ACE CDFL22	10	22	495	19.5"	1320	44	1.73"	19	3/4"	21	45	19 X 82	3/4" X 3 1/4"

Rotary Drill



ACE SD0014RR



ACE SD09B

Model	Weight		Length		BPM	Air Inlet		Air Consumption		Shank Size	Retainer Type
	(Kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)	(l/s)	(cfm)		
ACE SD0014RR	6.5	14.3	480	19"	2520	9.5	3/8"	22	47	22 X 82.5	Spring
ACE SD09B	4.5	10	380	15"	3420	9.5	3/8"	9	19	19 X 95	Quick Change



ACE RD658



ACE RD12D



ACE RD12T



ACE RD658 5L



ACE RD 571



ACE RD 32



ACE RD 330

Model	Weight		Length		BPM	Piston Stroke		Air Inlet		Air Pressure		Air Consumption		Shank Size	
	(kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(bar)	(psi)	(l/s)	(cfm)	(mm)	(inch)
ACE RD658	25	55	565	22.2"	2040	59	2.32"	19	3/4"	6	87	58	123	22 x 108	7/8" x 4 1/4"
ACE RD12D	9.8	21.6	565	22.2"	2580	41	1.61"	19	3/4"	6	87	24	51	22 x 108	7/8" x 4 1/4"
ACE RD12T	11.1	24.5	505	19.9"	2580	40	1.57"	19	3/4"	6	87	24	51	22 x 108	7/8" x 4 1/4"
ACE RD658 5L	24	53	565	22.2"	2040	59	2.32"	19	3/4"	6	87	58	123	22 x 108	7/8" x 4 1/4"
ACE RD 571	18	39	510	20"	2100	60	2.36"	19	3/4"	6	87	39	83	22 x 108	7/8" x 4 1/4"
ACE RD 32	24.5	54	584	23"	1980	51	2"	19	3/4"	6.2	92	48	102	22 x 108	7/8" x 4 1/4"
ACE RD 330	23	50.7	609	24"	2650	51	2"	25	1"	6	87	57	120	22 x 108	7/8" x 4 1/4"

Jackleg Drill



ACE S215



ACE RD 656 4W



ACE RD 16W



ACE S250

Model	Weight		Length		BPM	Piston Stroke		Air Inlet		Air Pressure		Air Consumption		Shank Size	
	(Kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(bar)	(psi)	(l/s)	(cfm)	(mm)	(inch)
ACE S215	25.5	56.2	730	28.7"	2175	55	2.16"	19	3/4"	6	87	55	115	25 x 158	7/8" x 6 1/4"
ACE RD656 4W	22	53	658	25"	2040	59	2.32"	19	3/4"	6	87	48	102	22 x 108	7/8" x 4 1/4"
ACE RD 16W	28.5	63	705	28"	2340	55	2.16"	9.5	3/8"	6	87	69	146	22 x 108	7/8" x 4 1/4"
ACE S250	32.5	76.6	708	27.9"	2200	73.25	2.88	25	1"	6	87	73	156	22 x 108	7/8" x 4 1/4"

Jackleg / Pusherleg



ACE 51



ACE 62K

Model	Weight		Length Extracted		Length Retracted		Piston Diameter Bore		Extension Length	
	(Kg)	(Lbs)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)
ACE 62K	17	37.5	3115	122.6"	1815	71.5"	53	2.09"	1300	51.18"
ACE 51	15	33	2985	117.5"	1658	65.27"	60	2.36"	1300	51.18"

Pneumatic Drifter



ACE 120F



ACE 120 FZ Drifter

Model	Weight		Length		BPM	Piston Stroke		Piston Dia		Air Pressure		Air Consumption		Shank Size
	(Kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(bar)	(psi)	(l/s)	(cfm)	
ACE 120	70	152	780	31"	2100	65	2.56"	120	4.72"	6-7	90-105	167	354	R32, R38 & T38
ACE 120 FZ	70	152	780	31"	2100	65	2.56"	120	4.72"	6-7	90-105	167	354	R32, R38 & T38

DTH Hammer




ACE 475



ACE 400

Model	Weight W/O Bit		Length W/O Bit		Outside Diameter		Piston Weight		Hole Size		Drill Pipe Connection	Suitable Shank	Air Consumption	
	(Kg)	(Lb)	(mm)	(inch)	(mm)	(inch)	(Kg)	(Lbs)	(mm)	(inch)			(cfm)	(psi)
ACE 475	47	103.6	980	38.5"	107	4.2	10.5	23.14	120-140	4.7"-5.5"	API 2 3/8" Reg. Pin	4 3/4" K4	730	300
ACE 400	38	83.7	914	35.9"	98	3.8	7.34	16.8	115-127	4.3"-5.9"	API 2 3/8" Reg. Pin	M4	560	350

Rammer / Tamper



**ACE 11
Bench Rammer**



**ACE 03
Sand Rammer**



**ACE 04 RV
Backfill Tamper**

Model	Weight		Length		BPM	Piston Stroke		Air Inlet		Air Consumption		But Dia	
	(Kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)	(inch)	(inch)	(l/s)	(cfm)	(mm)	(inch)
ACE 11 RAMMER	4.5	9.9	457	17.9"	850	102	4"	Rc1/4"	1/2"NPTF	8.4	18	Steel 63.5	2.5"
ACE 03 RAMMER	12	26.4	1320	51.9"	800	152	5.98"	Rc3/8"	1/2"NPTF	8.4	18	Steel 63.5	2.5"
ACE 04 RV TAMPER	19	41.8	1270	50"	780	152	6"	Rc1/4"	1/2"NPTF	8.4	25	Steel 160	6.29"

Scabblers



ACE 06



ACE 06 SVR



ACE 1TD

Model	Weight		Length		BPM	Air Inlet		Piston Type	Air Consumption	
	(Kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)		(l/s)	(cfm)
ACE 06 SCABBLER	5.5	12.5	470	18.5"	3000	12.7	1/2" NPTF	Three 3-point carbide tipped pistons	13	28
ACE 06 SVR	6.5	14	470	18.5"	3000	12.7	1/2" BSP	Three 3-point carbide tipped pistons	13	28
ACE 1TD SCABBLER	2.1	4.6	481	18.5"	2400	10	3/8" NPTF	Three 1-point carbide tipped pistons	3.7	8



ACE DG 3050



ACE DG 9107

Model	Weight		Length		RPM (Free Speed)	Air Inlet		Wheel		Collet Size	
	(Kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)
ACE DG 3050	1.8	4	311	12"	18000	10	3/8"	40	1 1/2"	6	1/4"
ACE DG 9107	0.5	1	124	4.7/8"	35000	6	1/4"	24	15/16"	6	1/4"

Needle Scaler



ACE 455L NS

Model	Weight		Length		BPM	Piston Stroke		Air Inlet		Air Consumption		Shank Size
	(Kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(l/s)	(cfm)	
ACE 455L NS	3.1	7.7	450	17.7"	4200	28.6	1 1/8"	10	3/8"	0.34m3	12	12.7



ACE WF445L

Model	Weight		Length		BPM	Piston Stroke		Air Inlet		Bore		Air Consumption		Shank size (mm)
	(kg)	(Lbs)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(l/s)	(cfm)	
ACE WF445L	1.90	4.2	232	9 1/8"	4600	28.6	1 1/8"	10	3/8"	25.4	1"	0.34M3	12	12.7

ROCK DRILLING TOOLS

Shank Adaptor




Thread	Length	Machine
R22, R25, R28, R32, R38, T38, T45, T51, St58, St68	187 (mm) - 1560 (mm)	1. Atlas Copco 2. Sandvik 3. Furukawa

Coupling Sleeves



ACE Part No	Thread Type	Dia (OD)		Length		OEM Ref No
		(mm)	(inch)	(mm)	(inch)	
CS2222-140-31	R22	31	1.22"	140	5.5"	7991-2031
CS2222-160-35	R25	35	1.38"	160	6.2"	-
CS2222-150-44	R32	44	1.75"	150	5.9"	7993-3644
CS2222-170-55	R38	55	2.16"	170	6.6"	7994-3655
CS2222-191-55	T38	55	2.16"	191	7.5"	7314-3652
CS2222-210-63	T45	63	2.50"	210	8.2"	7315-3663
CS2222-235-45	T45	77	3.03"	235	9.2"	-
CS2222-235-51	T51	71	2.80"	232	9.2"	7316-3671

Reduction Coupling Sleeve

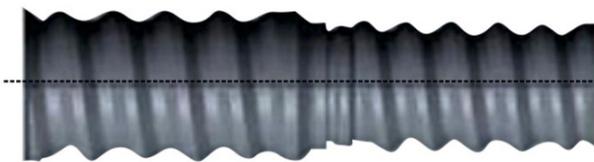

ACE Part No	Thread Type	Dia (OD)		Length		OEM Ref No
		(mm)	(inch)	(mm)	(inch)	
RCSR25R22	R22 X R22	44	1.75"	150	5.9"	
RCSR32R25	R32 X R25	43	1.66"	160	6.29"	7993-2443
RCSR38R25	R38 X R25	55	2.16"	177	7"	
RCSR32R38	R32 X R38	55	2.16"	160	6.29"	
RCST38R38	T38 X R 38	55	2.16"	185	7.29"	7314-4455
RCST51R45	T51 X R 45	71	2.51"	218	8.19"	7316-6271

Integral Drill Rod



Shank Size	Length		Bit Diameter		Weight	
	(mm)	(feet)	(mm)	(inch)	(kg)	(lb)
22 X 108 mm (7/8" X 41/4")	400	1.3	35	1.35"	1.5	3
	800	2.7	34	1.30"	3	6.5
	1600	5.3	33	1.25"	5.4	12
	2400	7.10	32	1.20"	7.9	17.5
	3200	10.6	31	1.18"	10.3	22.5
	4000	13.1	30	1.14"	12.6	27.7
	4800	15.9	29	1.10"	15.1	33.2
	5600	18.4	28	1.06"	17.6	38.7
	6400	21	27	1.02"	19.9	43.8
7200	23.6	26	0.98"	22.3	49	
8000	26.5	2	0.94"	25	55	

Tapered Rod



Shank Size	Degree	Length	
		(mm)	(feet)
22 X 108 mm (7/8" X 14/4")	7"	610	2
		800	2.6
		1220	4
		1830	6
		1980	6.6
		2440	8
		3050	10
		3660	12
	11"	800	2.6
		1220	4
		1830	6
		1980	6.6
		2440	8
		3050	10
		3660	12

Extension Rods



Thread	ACE Part No Model	Length		Dia	
		(mm)	(inch)	(mm)	(inch)
R22 - R22	AER800 - R22R22	800 mm	2.7 Ft	22 mm	7/8"
	AER1200 - R22R22	1200 mm	3.11 Ft		
	AER1600 - R22R22	1600 mm	5.3 Ft		
	AER2400 - R22R22	2400 mm	7.10 Ft		
	AER3200 - R22R22	3200 mm	10.6 Ft		
R32 - R32	AER610 - R32R32	610 mm	2 Ft	32 mm	1 1/4"
	AER915 - R32R32	915 mm	3 Ft		
	AER1220 - R32R32	1220 mm	4 Ft		
	AER1830 - R32R32	1830 mm	6 Ft		
	AER2440 - R32R32	2440 mm	8 Ft		
	AER3050 - R32R32	3050 mm	10 Ft		
	AER3660 - R32R32	3660 mm	12 Ft		
R38 - R38	AER1220 - R38R38	1220 mm	4 Ft	39 mm	1 1/2"
	AER1830 - R38R38	1830 mm	6 Ft		
	AER2345 - R38R38	2435 mm	8 Ft		
	AER3050 - R38R38	3050 mm	10 Ft		
T38 - R32	AER4305 - T38R32	4305 mm	14 Ft	39 mm	1 1/2"
	AER4915 - T38R32	4915 mm	16 Ft		
	AER5525 - T38R32	5525 mm	18 Ft		
	AER6135 - T38R32	6135 mm	20 Ft		
T45 - T45	AER3050 - T45T45	3050 mm	10 Ft	45 mm	1" x 4/5"
	AER3660 - T45T45	3660 mm	12 Ft		
	AER4265 - T45T45	4265 mm	13 Ft		
	AER6095 - T45T45	6095 mm	20 Ft		
T51 - T51	AER3660 - T51T51	3660 mm	12 Ft	52 mm	2"
	AER4265 - T51T51	4265 mm	13 Ft		
	AER6095 - T51T51	6095 mm	20 Ft		




ACE Part No.	Bit Diameter		Buttons Qty Size.mm		Flushing Hole	
	(mm)	(inch)	Gauge	Face	Face	Side
TB730	30	1 ³ / ₁₆ "	4X7	1X7	2	1
TB732	32	1 ¹ / ₄ "	5X7	2X7	2	1
TB732	32	1 ¹ / ₄ "	6X7	2X7	2	1
TB735	35	1 ³ / ₈ "	6X7	2X7	2	1
TB738	38	1 ¹ / ₂ "	4X8	2X8	1	0
TB741	41	1 ⁵ / ₈ "	5X9	2X8	1	1
TB1132	32	1 ¹ / ₄ "	6X7	2X7	2	2
TB1138	38	1 ¹ / ₂ "	5X9	2X7	1	1
TB1140	40	1 ³⁷ / ₆₄ "	5X9	2X7	1	1


Top Hammer Bits




Description	Technical Details
Threaded Bits	Thread Size : R25, R32, R38, T45, T51
	Diameter (D) : 38,41,45,51,64,76,89,115,127,140(all in mm)
Retract Bits	Thread Size : R32, R38, T45, T51, St61
	Diameter (D) : 57,64,76,89,115,127,140(all in mm)
DTH Hammer Bits	Thread Size : M4, K43
	Diameter (D) : 115,120(all in mm)

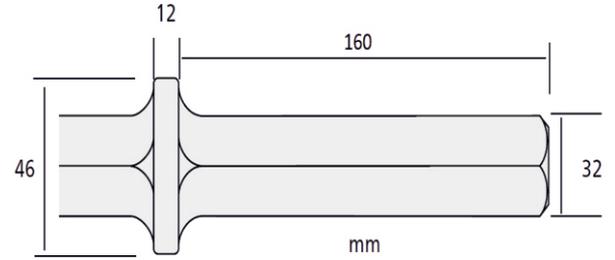


32 X 160 mm Hex Shank Chisel

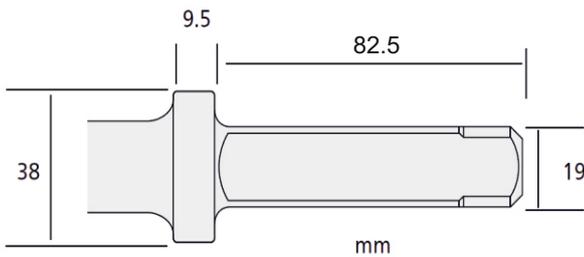


19 X 82.5 mm Square Shank Chisel

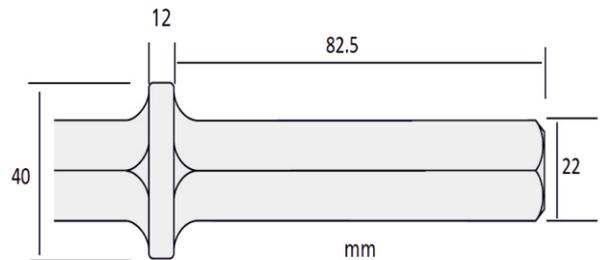


22 X 82.5 mm Hex Shank Chisel

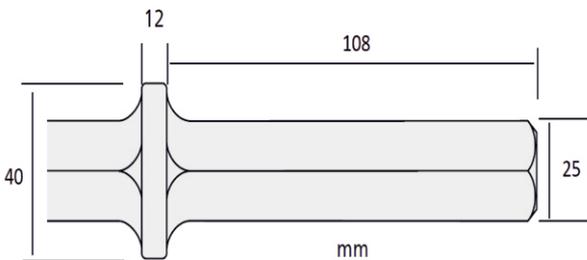


25 X 108 mm Hex Shank Chisel

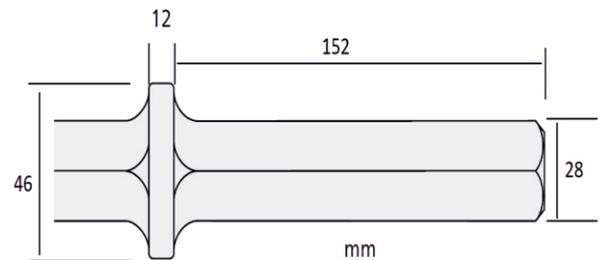

28 X 152 mm Hex Shank Chisel

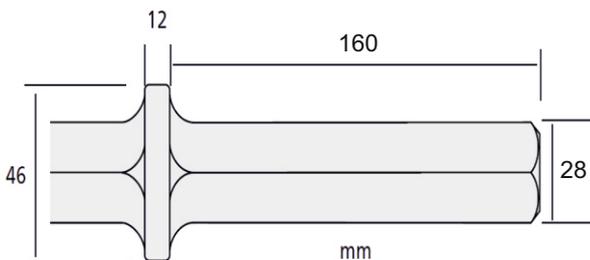


28 X 160 mm Hex Shank Chisel

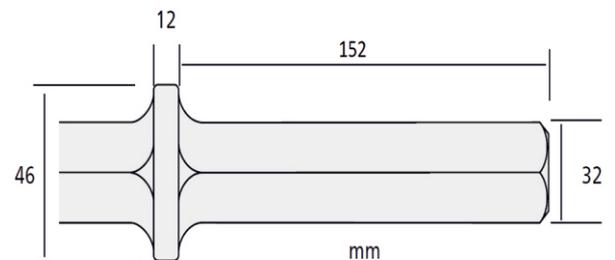


32 X 152 mm Hex Shank Chisel


Chipping Hammer Steel

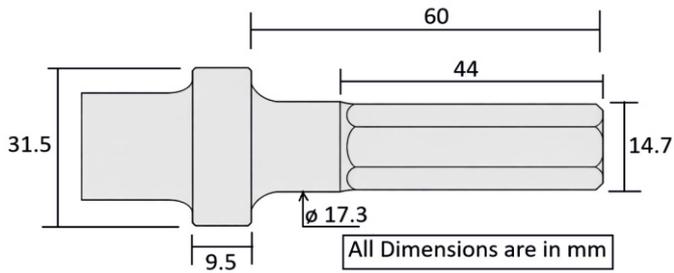


.580 Hex Shank- Round Collar

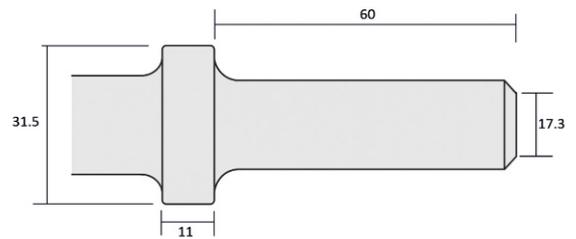

.680 Round Shank- Round Collar

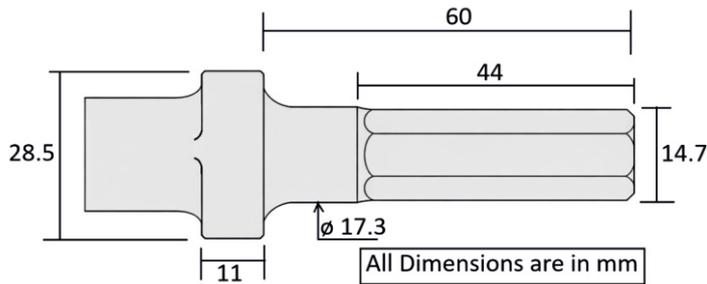


.580 Hex Shank- Oval Collar

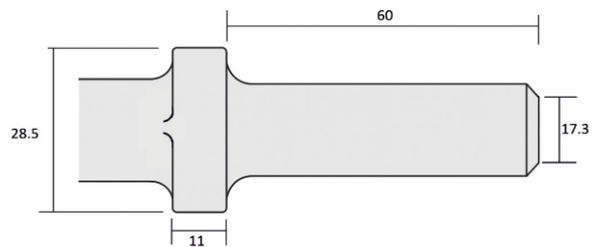


.680 Round Shank- Oval Collar

Pick Hammer Chisel

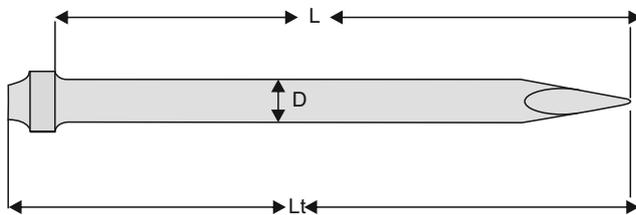


21X12mm 0.826" X 0.472" Round Shank Chisel

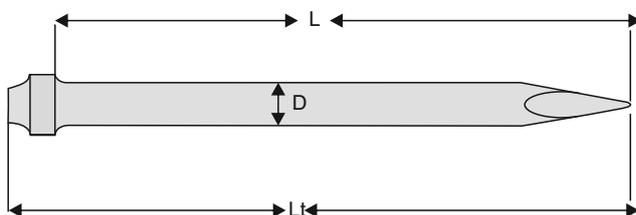


23X14mm 0.905" X 0.551" Round Shank Chisel




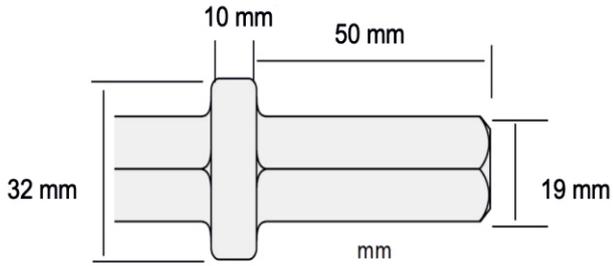


19x50 Hex Shank Chisel

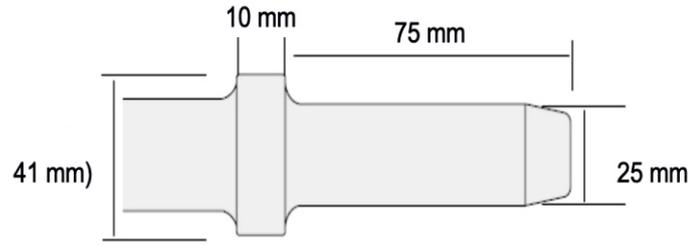

25x78 Round Shank Chisel

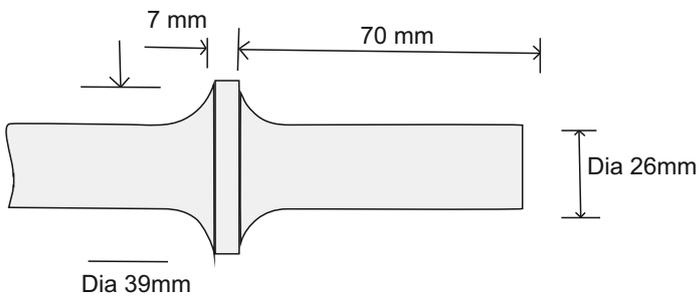

26x70 Round Shank Chisel

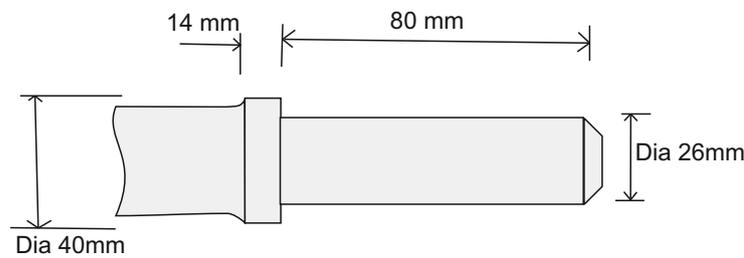


26x80 Round Shank Chisel


Rivet Buster Tool



(INCHES)

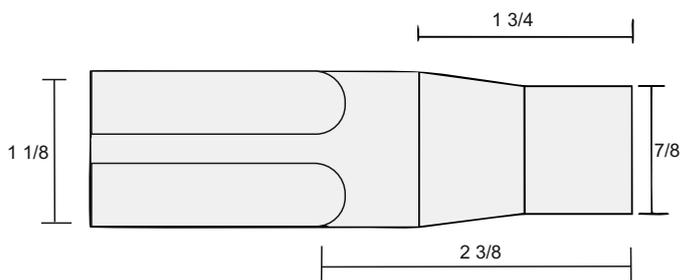

Jumbo Rivet Buster Tool

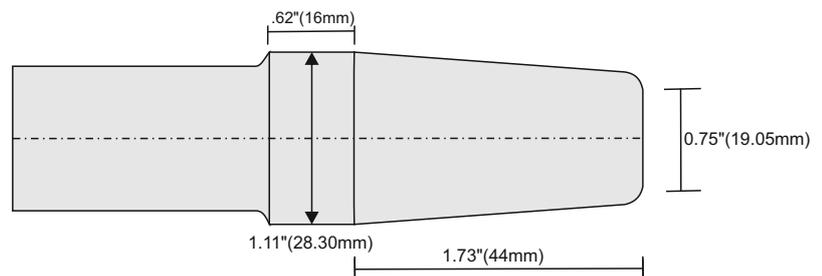


Standard Rivet Buster Tool



Rivet Boyer Snap Type.	Size of Rivet							
Flush Type Snap	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1 1/2"	1 1/4"
Button Type Snap	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1 1/2"	1 1/4"
Shallow Button Type Snap	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1 1/2"	1 1/4"
Liverpool Type Snap	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1 1/2"	1 1/4"
PAN Type Snap	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1 1/2"	1 1/4"
Cone Type Snap	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1 1/2"	1 1/4"

Plug Drill (TCT Rod)



Point Type	Part No	Drill Depth		Bit Diameter (B)		Length (L)		Weight	
		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(Kg)	(Lbs)
	TCT-C9-13-203	203	8"	13	1/2"	330	13"	0.7	1.5
	TCT-C9-16-203	203	8"	16	5/8"	330	13"	0.7	1.5
	TCT-C9-19-203	203	8"	19	3/4"	330	13"	0.7	1.5
	TCT-C9-22-203	203	8"	22	7/8"	330	13"	0.7	1.5
	TCT-C9-25-203	203	8"	25	1"	330	13"	0.7	1.5
	TCT-C9-13-305	305	12"	13	1/2"	430	17"	1.2	2.5
	TCT-C9-16-305	305	12"	16	5/8"	430	17"	1.2	2.5
	TCT-C9-19-305	305	12"	19	3/4"	430	17"	1.2	2.5
	TCT-C9-22-305	305	12"	22	7/8"	430	17"	1.2	2.5
	TCT-C9-25-305	305	12"	25	1"	430	17"	1.2	2.5

ACE 1.2 AIR LINE LUBRICATORS



Specification	metric	imperial
Weight	3 Kg	6.6 Lb
Oil Volume	1.3 Ltr	0.33 Gallon
Air Flow	25-130 l/s	53-275 cfm
Hose Diameter	25 mm	1"
Max Air Pressure	20 Bar	290 PSI

ACE 50 AIR LINE LUBRICATOR



Specification	metric	imperial
Weight Empty	3.5 Kg	8 Lb
Weight Full	5.5 Kg	11.5 lb
Length	200 mm	8"
Oil Volume	0.71 Ltr	0.19 Gallon"
Safety Fill Cap Diameter	48 mm	1 7/8"
Air Flow	48 l/s	102 Cfm
Hose Diameter	25 mm	1"
Max Air Pressure	17.5 Bar	250 PSI

HOSE PIPE



Specification	metric	imperial
ID Size	19 mm	7/8"
OD Size	25 mm	1"
Thickness Overall	2.8 mm	0.11"
Length roll	100000 mm	100 Mtr
Coupling	Without	Without
Bend Radius	153 mm	6"
Working Pressure	20-25 bar	300-360 PSI"
Blasting Pressure	60 Bar	900 PSI
Temprature	-30 °C + 80 °C	-22° F to 176° F

Rock Breaker (Hydraulic Breaker)



Model	Weight		Length		BPM	Impact Power		Tool Diameter		Operating Pressure		Optimum Oil Flow		Hose Diameter	
	(Kg)	(Lb)	(mm)	(inch)		(J)	(lb)	(mm)	(inch)	(kg/cm)	(psi)	(LMP)	(GMP)	(mm)	(inch)
ACE 30S	152	340	1403	55"	600-1100	750	553	53	2"	90-120	1280-1706	25-50	7.5-9.0	12	1/2"
ACE 50S	300	660	1403	55"	500-800	850	626	68	2.7"	90-120	1280-1706	30-45	7.9-11.9	12	1/2"
ACE 80S	538	1183	1938	76"	400-700	1400	1031	80	3.5"	140-160	2031-2312	45-85	11.9-22.5	19	3/4"
ACE 140S	875	1925	2317	92"	400-700	2500	1842	100	3.9"	150-170	2176-2466	80-120	21.1-31.7	19	3/4"
ACE 150S	970	2134	2515	99"	400-700	3200	2360	110	4.3"	150-170	2176-2466	80-120	21.1-31.7	19	3/4"
ACE 220S	1690	3718	2750	109"	400-700	5800	4274	135	5.3"	160-180	2321-2611	120-160	31.7-42.2	25	1"
ACE 240S	1850	4070	2862	112"	400-600	6500	4790	140	5.5"	160-180	2321-2611	130-170	34.3-44.8	25	1"
ACE 330S	2630	5786	3290	130"	300-450	11000	8100	155	6.1"	160-180	2321-2611	170-240	50.0-63.4	31	1.1/4"



ROCK BREAKER CHISEL



ROCK BREAKER SPARES



ROCK BREAKER PISTON



**ROCK BREAKER CYLINDER
FRONT HEAD, BACK HEAD**

ACE PNEUMATICS

Manufacturer & Suppliers of High-Quality
Mining, Construction, Demolition Tools.

POWER
TECHNOLOGY
and TRUST

Plot no. G-126 M.I.D.C.
Ahmednagar-414111,
Maharashtra, India

info@aceneumatics.com
www.acepneumatics.com
Contact - 9527005855

